

DELTA®

DELTA® protects property. Saves energy. Creates comfort.

DÖRKEN

DELTA®-FOL PVG

The Added Extra on Roof Sheathing.

3-layer material.
Waterproof and tough.



Also as DELTA®-FOL PVG PLUS, with
integrated self-adhesive border.

DELTA® quality branded products made
by Dörken.

■ Tensioned
roofing
underlay

■ For ventilated
pitched roofs

■ New
construction
refurbishment

CLASSIC QUALITY

DELTA®-FOL PVG

Technical Data Overview:

Material	Spun-fibre material combined with a waterproof intermediate layer.
Application	On fully insulated pitched roofs with rigid sheathing.
Fire resistance	Class E (EN 13501-1) B 1 rating (DIN 4102)
Tensile strength	approx. 270/200 N/5 cm (EN 12311-1)
Watertightness	Watertight W 1 (EN 13859-1+2)
S _d value	approx. 3 m
Service temperature range	-40 °C to +80 °C
Weight	approx. 210 g/m ²
Roll weight	approx. 16 kg
Roll size	50 m x 1.5 m

Due to variable weather and UV conditions we recommend the efficient covering of our sheets.

A Reliable Combination of Materials Against Rain, Dust, and Driven Snow.

DELTA®-FOL PVG ...

- ... consists of three layers of material. A vapour-permeable layer between the spun-fibre sheets gives it better diffusive qualities than sheathing membranes containing bitumen and many plastic membranes.
- ... is watertight. Reliable protection from rain, dust and driving snow. Rigid sheathing can safely dry out. Equally good properties when used as a tensioned sheathing underlay.
- ... thanks to its special surface structure is very non-slip and abrasion-proof.
- ... can be laid directly underneath roof slates.



- ... weighing 210 g/m², is pleasantly light in comparison to bitumen sheathing membranes – increasing laying speeds and reducing costs.
- ... can be combined perfectly with the DELTA®-REFLEX/DELTA®-REFLEX PLUS air and vapour barrier.

Practical Accessories for DELTA®-FOL PVG:

DELTA®-MULTI-BAND

All-round adhesive tape featuring top adhesion.

DELTA®-THAN

Permanently elastic sealing compound for fixing and seam jointing of DELTA® sheet products.

DELTA®-NAGELDICHTUNGSBAND


Impregnated foam sealing tape.

DELTA®-PREN

Special semi-fluid adhesive.

Special surface structure.
Non-slip and abrasion-proof.

Laid directly
under roof slates.

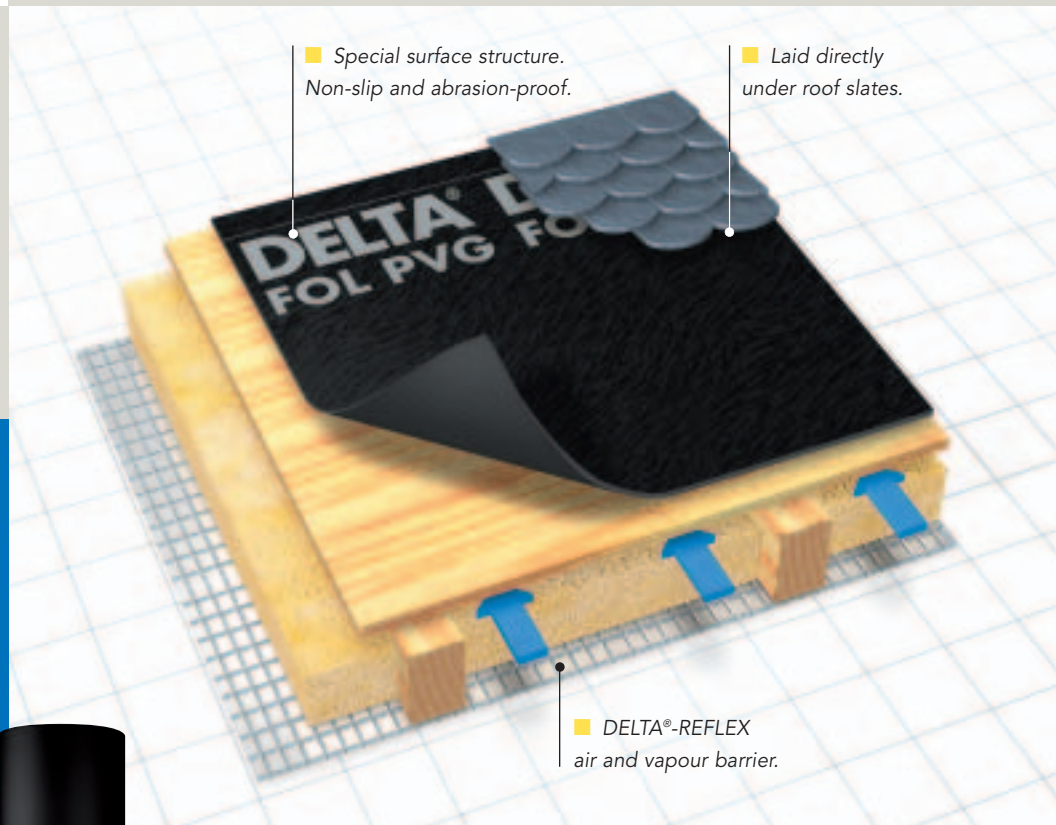

DELTA®-REFLEX
air and vapour barrier.

DELTA®

DÖRKEN

Dörken GmbH & Co. KG
Wetterstraße 58
D-58313 Herdecke
Tel.: +49 23 30/63-0
Fax: +49 23 30/63-355
bvf@doerken.de
www.doerken.de

A company of the Dörken Group.

Standard requests for tender and detailed installation instructions for all DELTA® products may be obtained from www.doerken.de as PDF files for you to print out and save.