

DELTA® protects property

DELTA®


DELTA®-MAXX X

The extremely robust membrane for pitched roofs



DELTA®-MAXX X

The extremely robust membrane offers double-plus bonding and high resistance to tearing

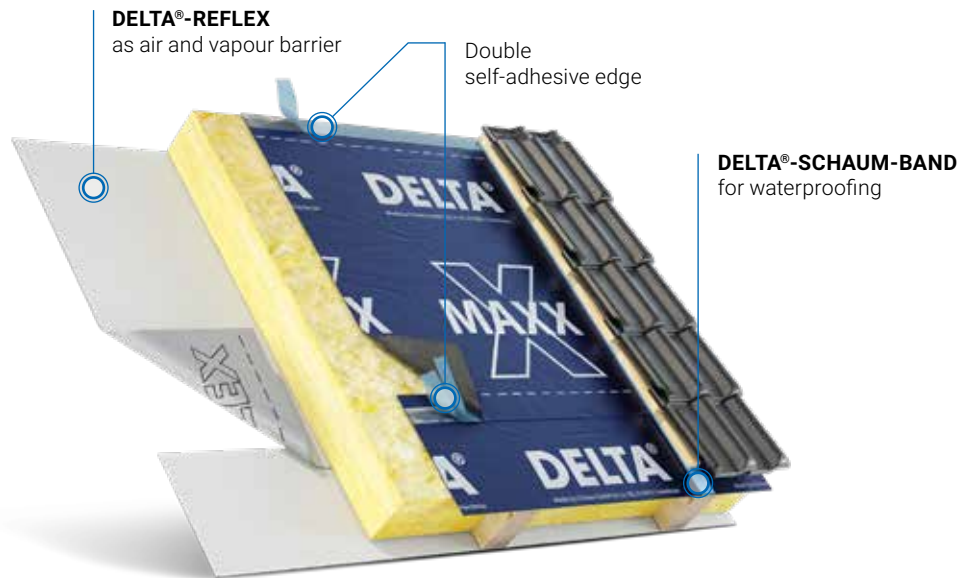

DELTA®-MAXX X – the essentials in brief

Material	Moisture-storing polyester fabric with waterproof vapour-permeable PU coating and waterproofing self-adhesive edge
Suitability	For fully insulated pitched roofs. Suitable as temporary covering. Also suitable as sheathing membrane.
Flammability	European fire class E, EN 13501-1
Tear strength	approx. 500/500 N/5 cm, EN 12311-1+2
Watertightness	Class W1, EN 13859-1+2
S_d-value	approx. 0.15 m, EN ISO 12572
Thermal stability	-40 °C to +80 °C
Short-term maximum thermal load	+120 °C
Resistance to driving rain	Passed: driving rain test, sarking membranes and underlay sheets – Technical University of Berlin
Increased requirements for ageing	Passed: ZVDH product data sheet, table 1 (ZVDH = Association of German Roofers)
Weight	approx. 210 g/m ²
Roll weight	approx. 16 kg
Roll dimensions	50 m × 1.50 m

Accessories



DELTA®-MULTI-BAND



DELTA®-THAN



DELTA®-FLEXX-BAND



DELTA®-SCHAUM-BAND SB 60

Advantages at a glance

- Extremely fall-through proof, with tear strength of 500N/5cm in lengthwise and crosswise directions.
- Fulfils DIN 4426 safety requirements for wide gaps between battens.
- Workable down to -10°C thanks to cold-resistant overlapping adhesive bonding.
- Resistant to hail impact up to 130 km/h: optimum temporary covering and reliable protection below the covering.
- Extremely puncture proof, fulfils Employer's Liability Insurance Association criteria for fall-through safety.
- Vapour-permeable and water-repellent polyurethane coating as well as moisture-storing backing fabric for the best-possible protection against moisture.
- Fitted out with DELTA®-AMS, DELTA®-BiCo and DELTA®-Ad Tec technologies.

DELTA®-MAXX X – permanently reliable safety:



Long-term protection against ageing



Facilitates windtight constructions



Very high UV protection



Breathable – releases moisture



Thermally stable up to 120°C



Resistant to driving rain



Fall-through proof when laying

Extremely
robust
kg



Dörken GmbH & Co. KG
Wetterstraße 58
58313 Herdecke

- +49 23 30/63-636
- +49 23 30/63-357
- bvf@doerken.de
- www.doerken.com/int
-  

A member of **DÖRKEN**GROUP



For further information material
visit our website and select Downloads



To find the right contact
partners for sales and technology
visit our website and select Contact



PEFC™ PEFC certified
This paper comes from sustainably managed forests and controlled sources