


DELTA®-LUXX

The moisture-regulating vapour retarder for a balanced indoor climate



DELTA®-LUXX

The regulating membrane for the best possible indoor climate

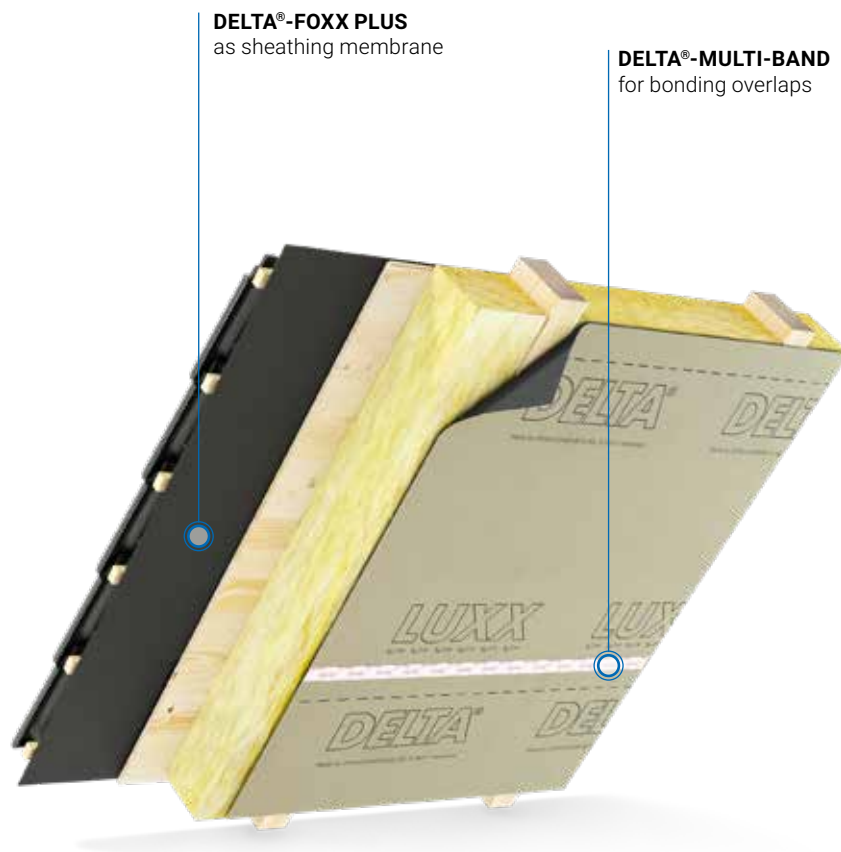

DELTA®-FOXX PLUS
as sheathing membrane

DELTA®-MULTI-BAND
for bonding overlaps

DELTA®-LUXX – the essentials in brief

Material	PP fabric with vapour retarder coating
Flammability	Class E, EN 13501-1
Tear strength	ca. 140/110 N/5 cm, EN 12311-1
S_d value	approx. 2 m
Thermal stability	-40 °C to +80 °C
Weight	approx. 150 g/m ²
Roll weight	approx. 11.5 kg
Roll dimensions	50 m × 1.50 m

Accessories



DELTA®-MULTI-BAND



DELTA®-INSIDE-BAND



DELTA®-FLEXX-BAND



DELTA®-TIXX VDR



DELTA®-TIXX



DELTA®-LIQUIXX

Advantages at a glance

- Thermally stable sheet made of highly tear-resistant PP fabric with a special vapour retarder coating.
- The membrane lets trapped moisture quickly dry out, including from the inside, and allows pitched roofs to “breath”.
- Stops draughts and reduces energy consumption.
- Regulates moisture with a S_d value of 2 m.

DELTA®-LUXX – dauerhaft zuverlässige Sicherheit:



Long-term protection against ageing



Watertight



Airtight



Makes drying possible from the inside



Dörken GmbH & Co. KG
Wetterstraße 58
58313 Herdecke

- +49 23 30/63-636
- +49 23 30/63-357
- bvf@doerken.de
- www.doerken.com/int
-  

A member of **DÖRKEN**GROUP



For further information material
visit our website and select Downloads



To find the right contact
partners for sales and technology
visit our website and select Contact



PEFC™ PEFC certified
This paper comes from sustainably managed forests and controlled sources